

LUDOWICI® BRACKET INTERLOCKING

DESCRIPTION

- Designed for Ludowici® Interlocking tile roofs
- Can be used with all Ludowici Interlocking tiles: Americana, Classic, Lanai, Williamsburg, & French
- Formed to match tile's interlocking profile
- End of bracket formed to lock onto upper end of tile for ease of installation
- Superior strength
- Can be powder coated to match roofing material color
- Overall dimensions: 1-3/16"W X 3-11/16"H X 15"L

MATERIALS


- Steel :: 16 ga
- Copper :: 48 oz. (ASTM B152)
- Cor-ten :: 16 ga (ASTM A606)
- Aluminum :: .063" (H32 - ASTM B209)

COLORS/FINISHES

- Electro-galvanized steel (ASTM A879)
- Hot-dipped galvanized steel
- Copper
- Mill finish Aluminum
- Powder coating available in RAL Standard colors
- Visit www.tra-mage.com/products.html to see color chart



FOR INTERLOCKING TILE ROOFS
Americana, Classic, Lanai, Williamsburg, French

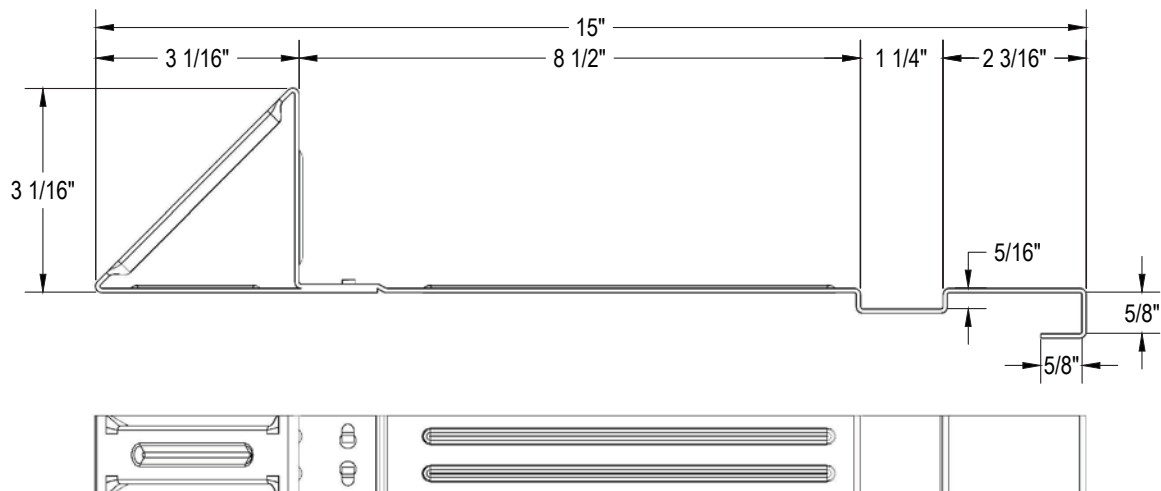

*Actual product dimensions may vary ±1/16"

BRACKET DIMENSIONS
(DO NOT SCALE)