

SNOW BRACKET A-CB

DESCRIPTION

- Designed for use with concrete tiles 16-1/2" to 17" in length which are installed using a counter batten system.
- No fasteners required.
- Can be powder coated to match roofing material color
- Overall dimensions: 16-1/16" L X 1-3/16" W X 4-5/8" H

MATERIALS

- Steel :: 16 ga
- Copper :: 48 oz. (ASTM B152)
- Cor-Ten® :: 16 ga (ASTM A606)
- Stainless Steel :: 16 ga
- Aluminum :: .063" (H32 - ASTM B209)

COLORS/FINISHES



- Electro-galvanized steel (ASTM A879)
- Hot-dipped galvanized steel
- Mill finish Copper
- Mill finish Aluminum
- Powder coating available in RAL Standard colors
- Visit <http://tra-mage.com/color-chart/> to see color chart

NOTE: Due to specific job conditions, TRA-MAGE will only warranty a snow retention system/layout that has been designed by TRA-MAGE.



FOR NEW CONSTRUCTION & RETROFIT

USED ON: COLUMBIA, EAGLE, HANSON, MONIER, LIFETILE, UNICRETE, WESTILE, AND OTHER SIMILAR TILES WHICH ARE INSTALLED USING A COUNTER BATTEN SYSTEM

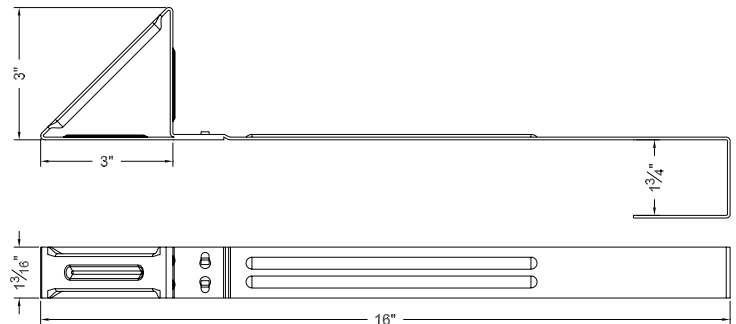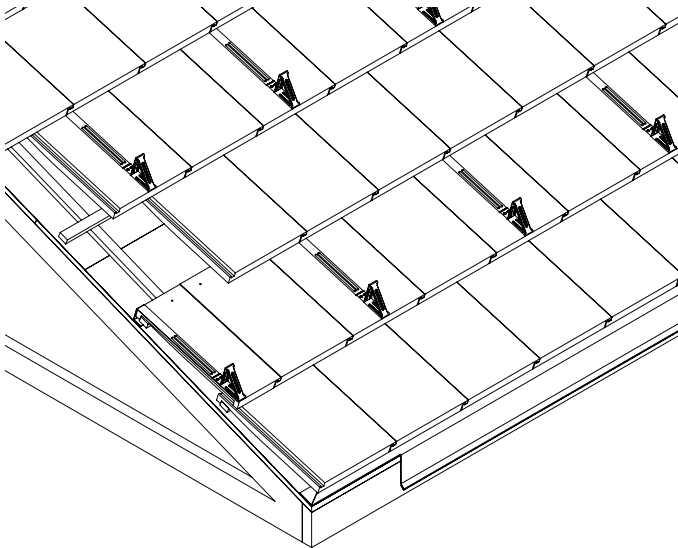

Snow Bracket hooks to upper end of roof tile and counter batten. Bracket is installed with triangular end of bracket at butt end of roof tile and upper end under the course above.

BRACKET INSTALLATION

DO NOT SCALE

BRACKET DIMENSIONS

DO NOT SCALE